


APPROVALS

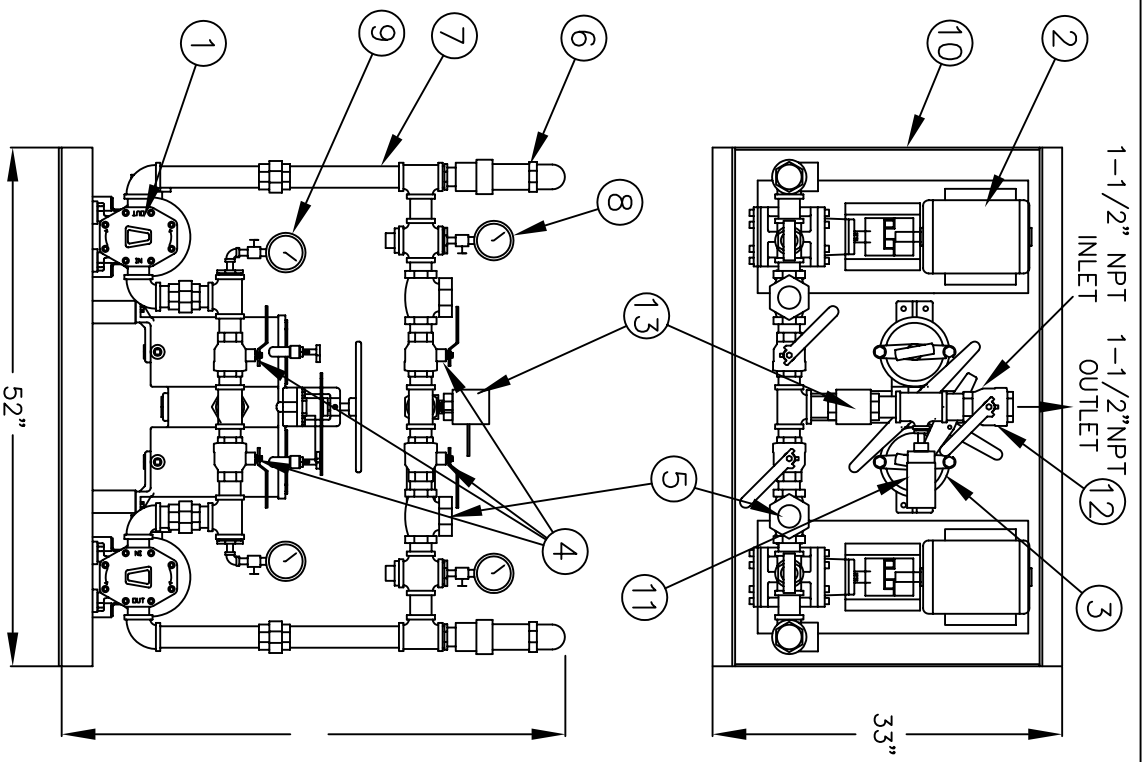

MODEL# FODUP / 35G / BS

NO.	DESCRIPTION	MFG	QUAN.
1	PUMP MODEL# 35GC (CW) 35GC (CCW)	ALBANY	1
2	HP $\frac{1}{2}$ V PH $\frac{1}{2}$ HZ RPM TEFC MOTOR	---	2
3	1-1/2" NPT DUPLEX BASKET STRAINER WITH 60 MESH S.S. SCREEN	KRASSL	1
4	BALL VALVE 1-1/2" NPT		4
5	CHECK VALVE 1-1/2" NPT		2
6	RELIEF VALVE 1 1/4" NPT		2
7	ALL 1-1/2" NPT PIPING EXCEPT RELIEF VALVE (1 1/4" NPT)	-	-
8	PRESSURE GAUGE 4" DIA.	WINTERS	2
9	COMPOUND VACUUM GAUGE 30"-0-30 PSI 4" DIA.	WINTERS	2
10	STEEL BASE WITH COUPLING GUARDS AND 2" DRIP LIP	ALBANY	1
11	HIGH / LOW PRESSURE SWITCH	ASCO	1
12	BALL VALVE 2" NPT		1
13	FLOW SWITCH - (OPTIONAL)		1

UNIT ADHERES TO CSA STD. B139

LIQUID DIESEL FUEL OIL
 PRESSURE 150 PSI (MAX.)
 CAPACITY 35 USGPM (MAX.)

ALBANY PUMP CO. LTD.	
DRWN. DAK	420 HARRY WALKER PARKWAY NEWMARKET, ONT. CANADA L3Y 8P5
DATE 3/22/2007	
SCALE NONE	DUPLEX FUEL OIL PKG.
CHK'D _	DRWG# 35 GALLON DUPLEX

This drawing and the information depicted therein is the property of Albany Pump Co. Ltd. Copies are issued in strict confidence and shall not be reproduced, copied or used as the basis for the manufacture or sale of products without prior written permission of Albany Pump Co.